

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.


Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

FIG.1

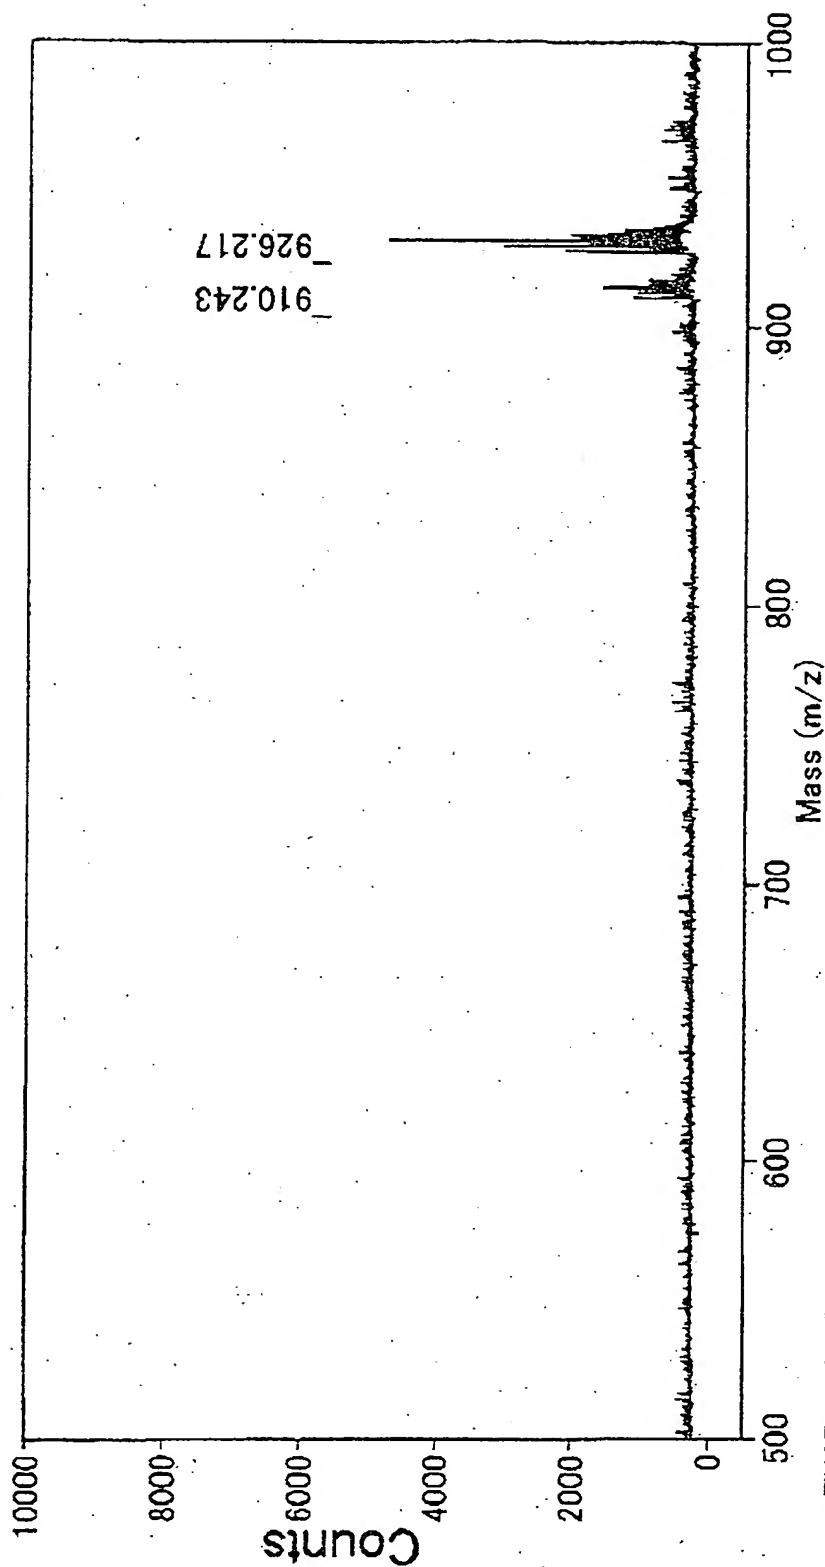

Comment: THAP posi ref

Method: RDE100K

Accelerating Voltage : 20000

Laser : 2500

Mirror Ratio : 1.060

Mode: Reflector

Grid Voltage : 57.500 %

Scans Averaged : 128

PSD Mirror Ratio :

Guide Wire Voltage : 0.050 %

Pressure : 5.05e-07

Timed Ion Selector : 1276.0 OFF

Delay : 50 ON

Low Mass Gate : 400.0

Negative Ions : OFF

FIG.2

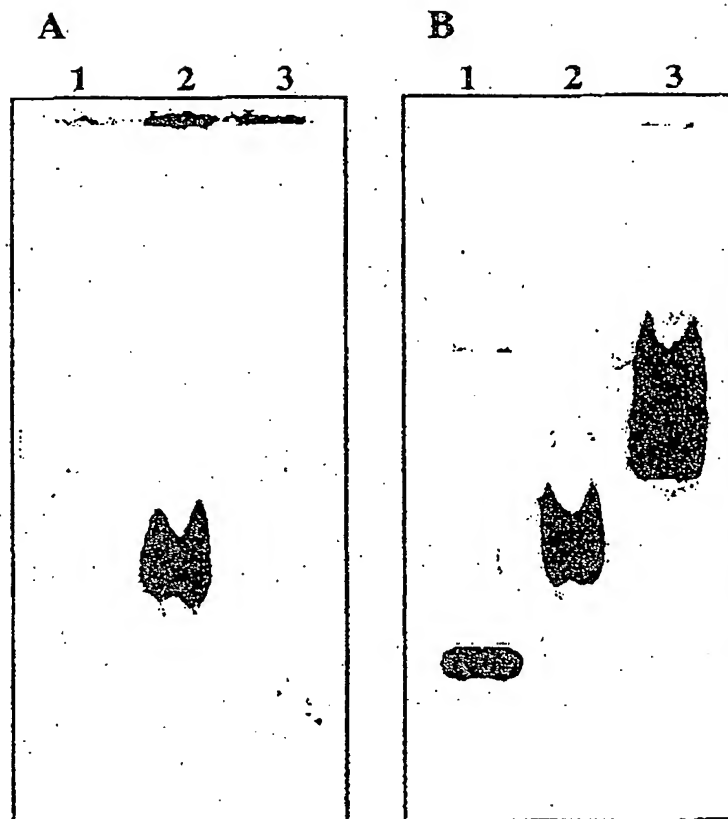


FIG.3

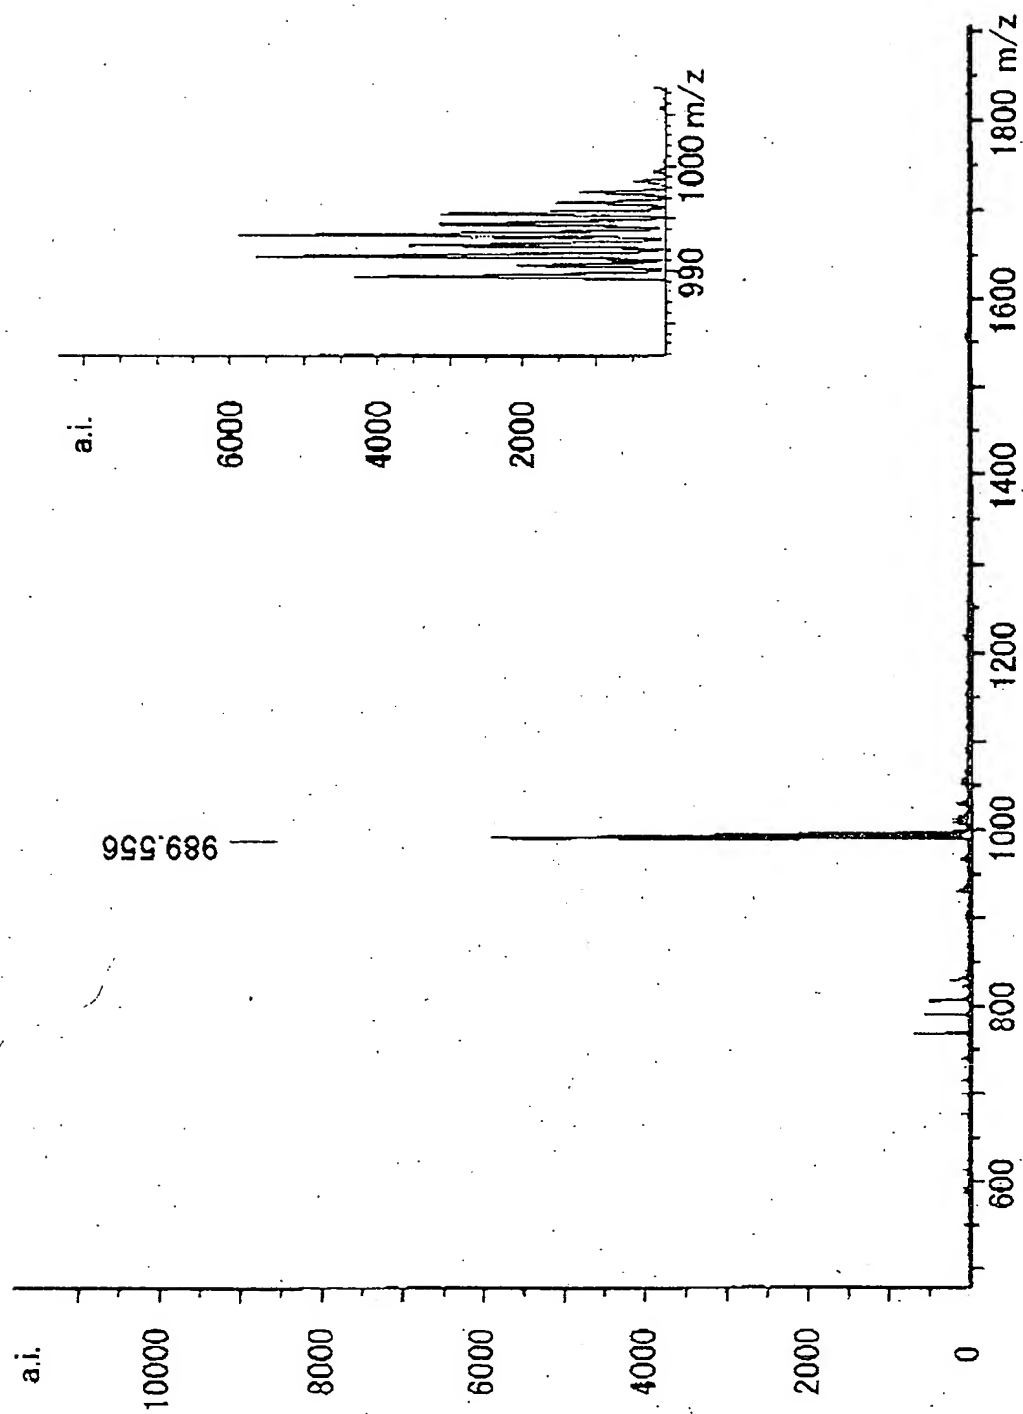


FIG.4

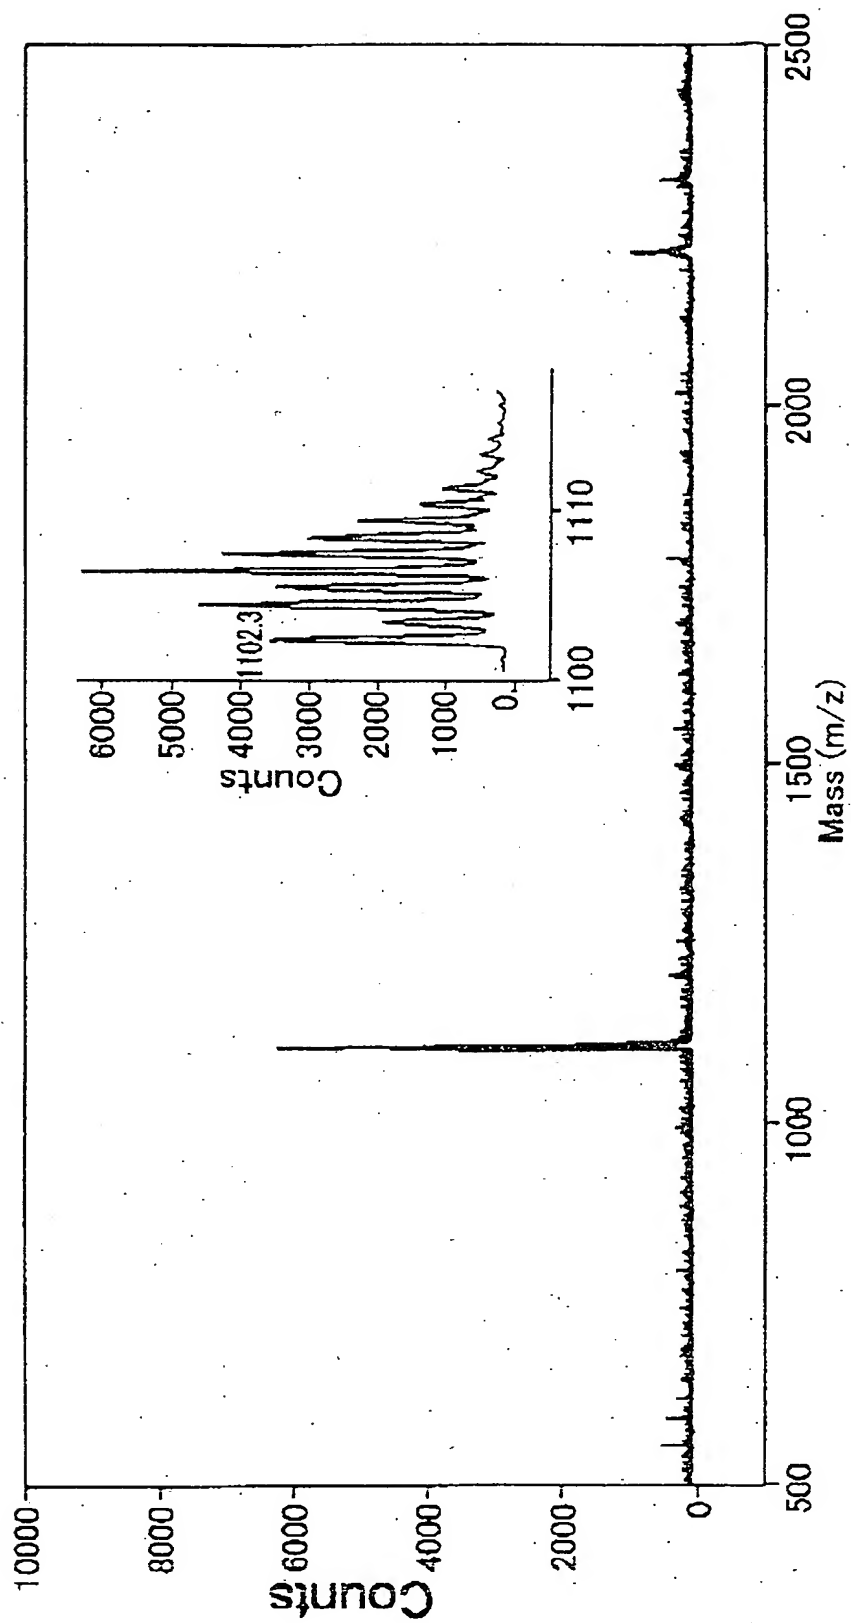


FIG.5

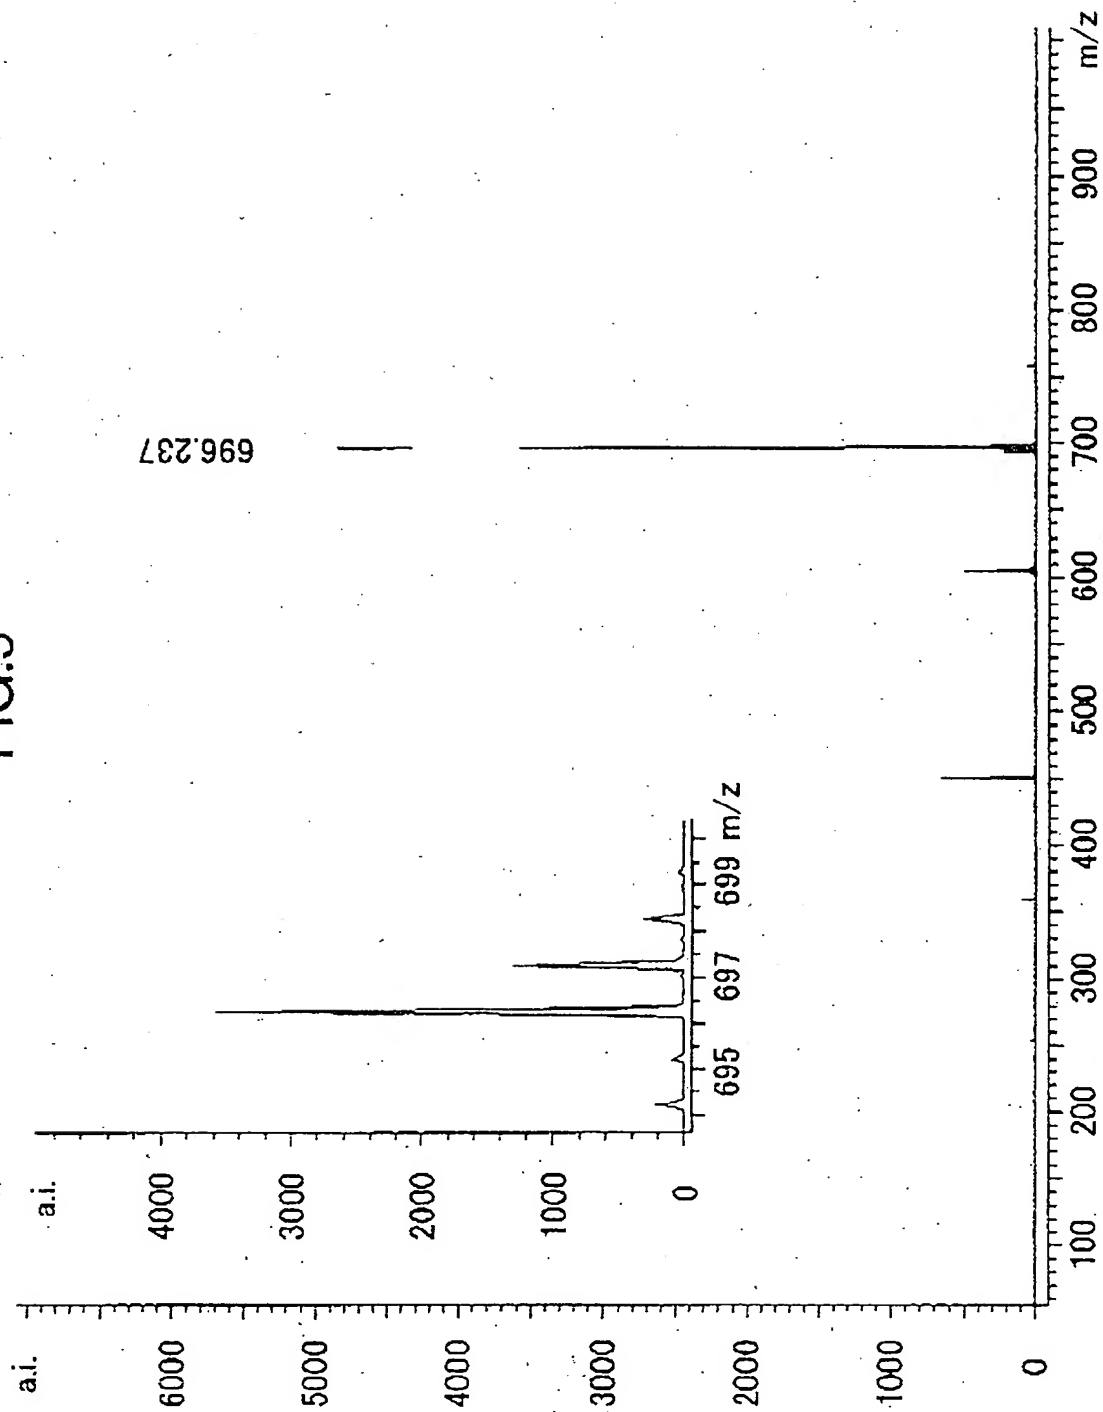
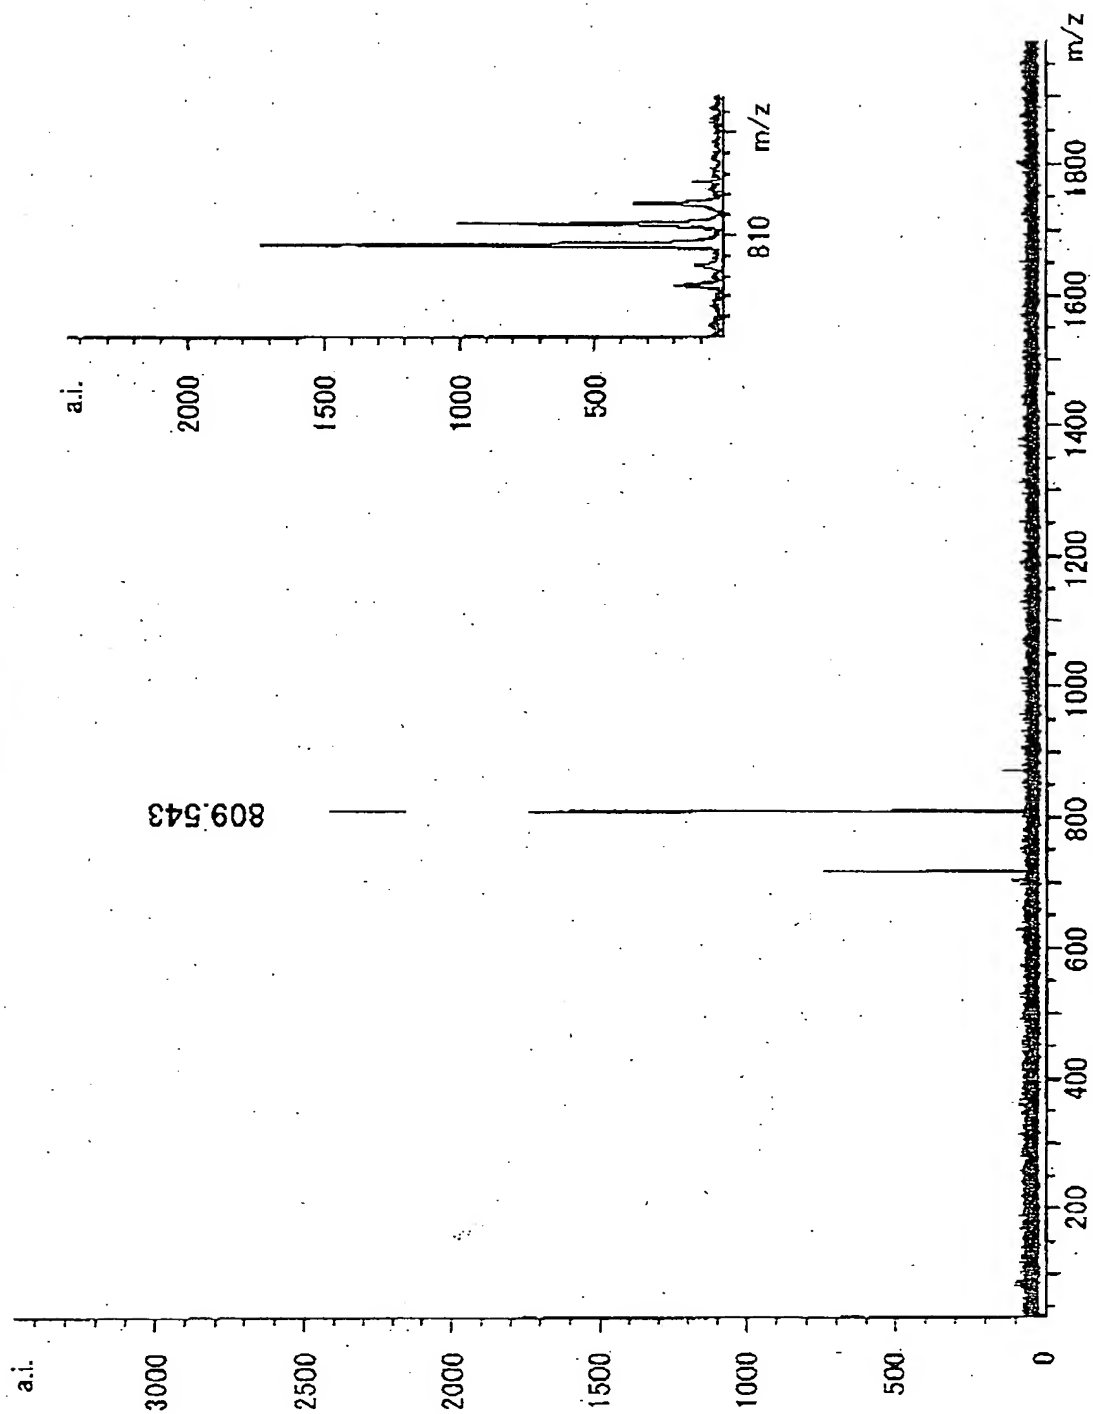


FIG.6



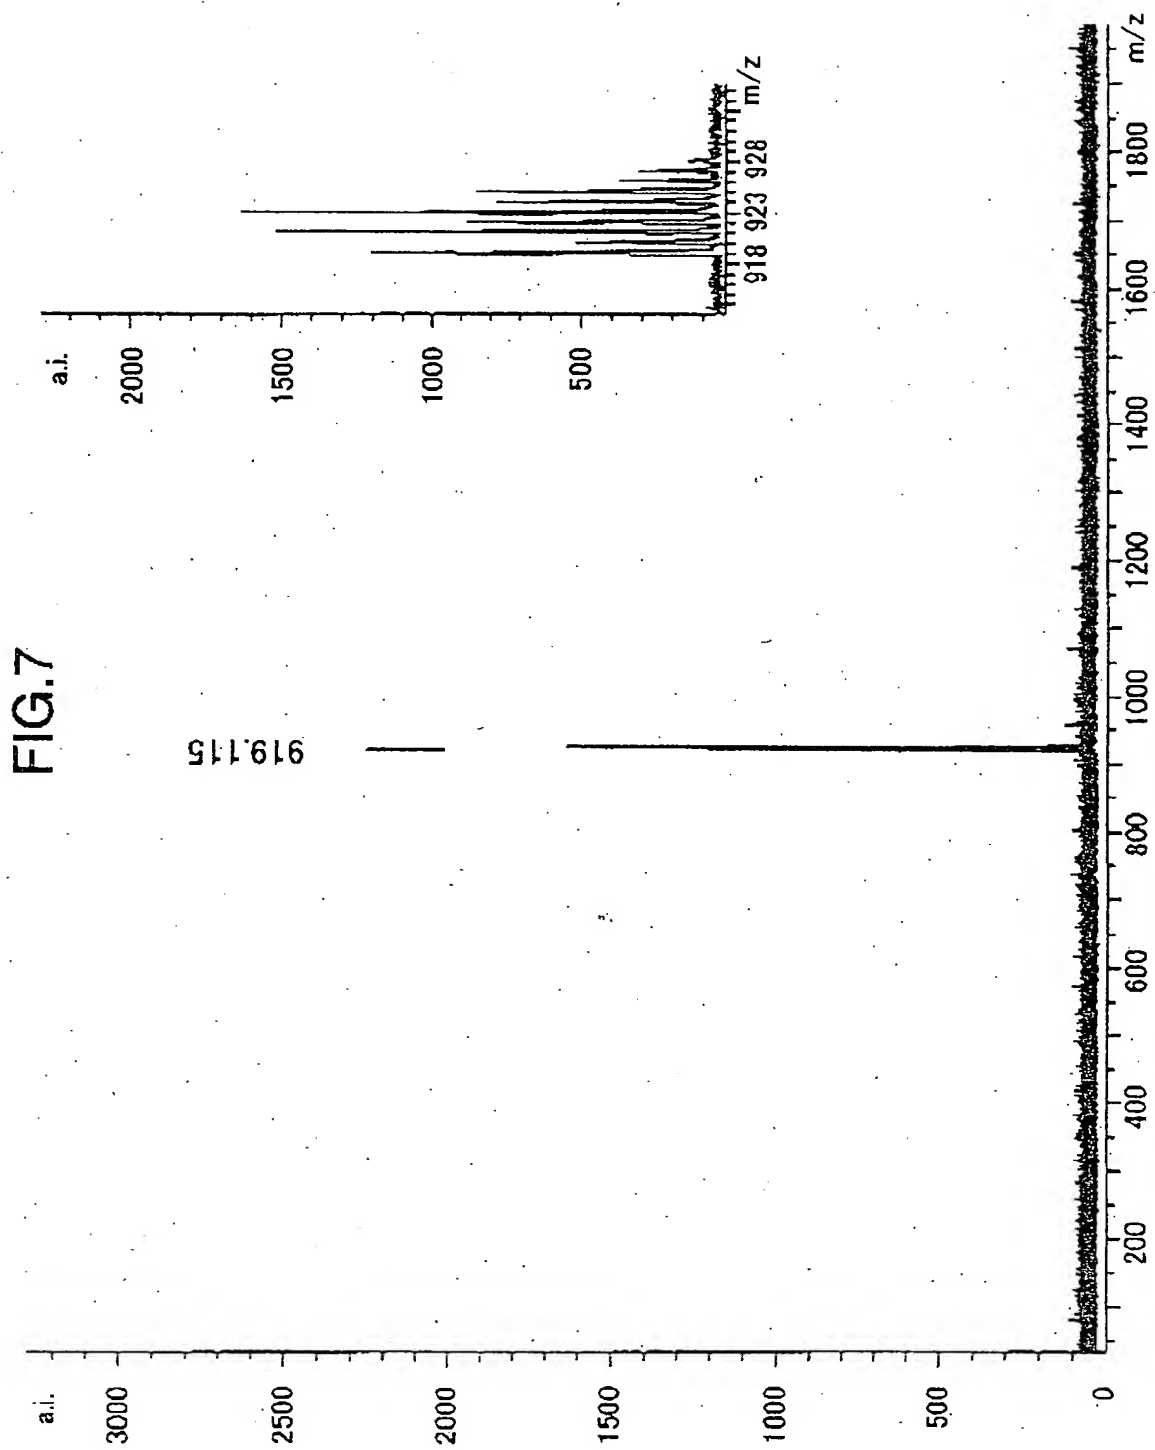


FIG.8

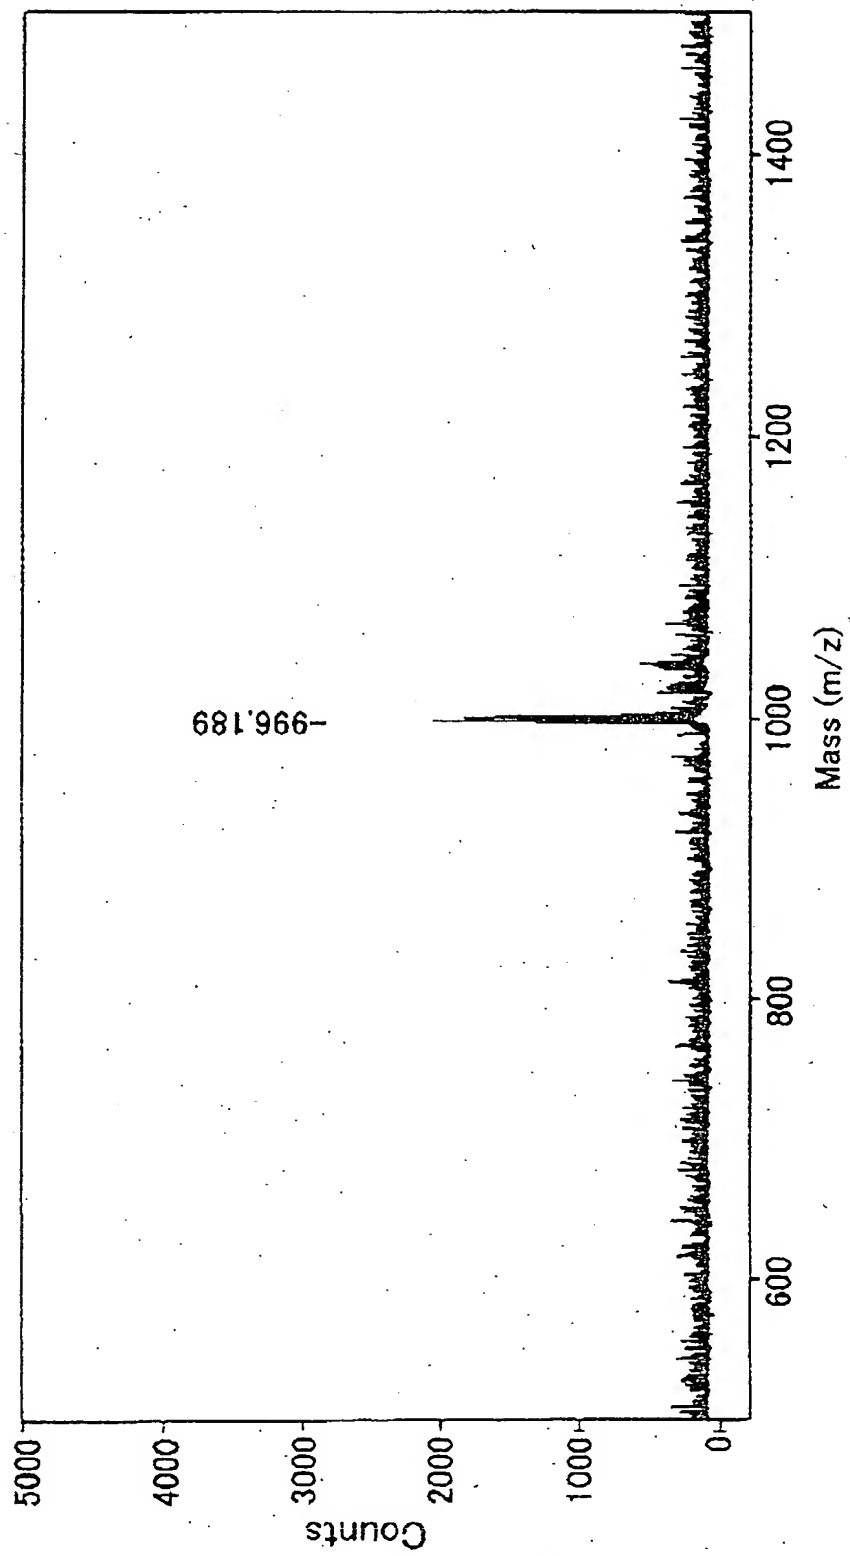


FIG.9

